

PureWaterCooler™

by VERTEX®

PWC 1800




Latest 2-temp Design with Upscale Look

Newest bottle-less water cooler with integrated cup holder and no-touch, single dispensing faucet provides great tasting hot or cold water at a touch of a button. The built-in filter system provides unlimited supply of fresh great tasting water when you need it eliminating the cost and hassle of 5-gallon bottles.

Features

- Two temperature system
Cold: 37-50° F, Adjustable • Hot: 180° F, Autocontrol
LED indicator for Hot and Cold water on the front panel
- Newly designed fill opening allows larger cups, mugs or reusable bottles
- Hygienic dispensing touch pad control with no-touch dispensing faucet
- Individual on/off control switches for cold and hot water on rear panel
- Completely sealed stainless steel cold reservoir and hot tank
- Built-in filtration system is easily accessed for replacement
Available with Reverse Osmosis filtration system
Or Standard Dual-Cartridge filtration system
- Available with ultraviolet or ozone sterilizer
- Attractive LED lighted dispense area
- Integrated cup dispenser
- 1 year limited warranty
- 3 year compressor warranty

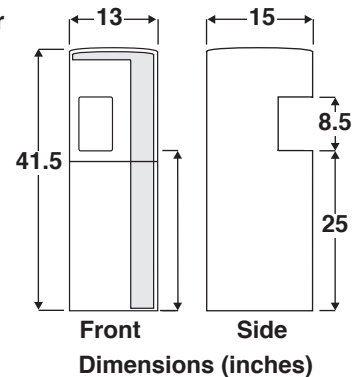

Specifications

Weight: 58 lb.
Dimension: 13"W x 15"D x 41.5"H
Cold tank volume 1 gal
Hot tank volume .5 gal
Cooling Rate: 1.5 gal/hr 37-50 °F
Heating Rate: 1.3 gal/hr 180 °F
Voltage: 115 VAC
Power Required: 600w max

Meets Energy Star Requirements
ADA compliant

Filter System

Standard Filter **1800F**
Stage 1: 5 micron Sediment
Stage 2: 10 micron Activated Carbon
Reverse Osmosis Filter **1800R**
Above 2 stages plus
Stage 3: 50-GPD RO Membrane
Automatic tank full control
Fully assembled
- connection hardware included



ORDERING INFORMATION

2-Temp Model - 50 GPD Reverse Osmosis	PWC-1800R
2-Temp Model - Standard Filtration	PWC-1800F
2-Temp Dispenser with UV stage	add /UV
2-temp model with Ozone sanitizer	add /OZ
2-temp Model w/ ProTekk Leak Detector	add /ldm
Replacement Filters Sediment	IFA-4035
GAC Carbon	IFA-4034
RO membrane, 75 GPD	MA-4203

Authorized Dealer

